

# VARIANT MIRROR



## VARIANT MIRROR

Material	whole area mirror, thickness 4 mm steel pipes $\varnothing$ 28 mm / steel profiles 70 x 11 mm
Connection thread	2 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C




VARIANT MIRROR 1806 x 608

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input stainless steel [W]	Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C		
1806/456	45	42,5	6,1	1,28	564	458	293	-	mc 50
1806/608	45	55,9	8,2	1,28	749	608	390	-	mc 50

Basic point on back is the anthracit S02.  
Thermal power measuring follows in accordance with EN 442.  
Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

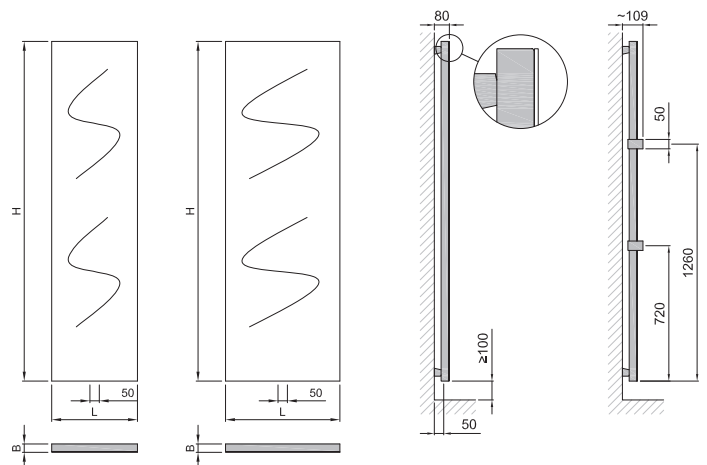

DVMR 1806 0456...

DVMR 1806 0608...

Option of adding up to 2 rails